

# Water storage and management

Load-bearing stormwater  
detention, retention, infiltration  
modules suitable for small  
or large applications



A new benchmark for vertical  
and horizontal loading

## Advantages

- Flushable
- Simple, fast installation (install by hand or by crane)
- Extremely durable
- All modules lock together
- Solid pipe connections (up to 500mm)
- Suitable for string drainage / infiltration line
- Suitable for road-registrable vehicular traffic



SA (School retention 165kL)



WA (Car park infiltration 600kL)



NSW (Council retention 850kL)

## Available from:

Ecowaterboxx Pty Ltd  
1 London Road  
Mile End, South Australia 5031

David Light (National Distribution)

E david@ecowaterboxx.com.au  
M 0414 934 911  
F 08 8152 0321

## CONTROL-BOX® & VARIO-BOX®

### Control-Box®

- High-strength and stable structure
- Integrated inspection and cleaning pipe – 500mm
- High-storage capacity (> 95%)
- Easily and quickly assembled and installed
- 100% polypropylene (modules stamped PP)
- Modules lock together with connectors
- Assembled dimensions 600mm x 600mm x 600mm



Pre assembled



Multiple distribution inlets



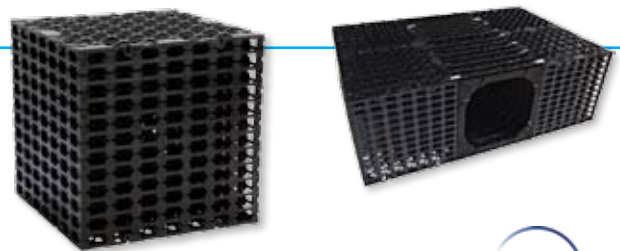
Soak pits







### Vario-Box® NEW

#### Heavy duty stormwater infiltration system

- Extreme high-strength and stable structure
- Flexible in its range of applications
- High-storage capacity (> 95%)
- Optional distribution / inspection / flushing channel available
- 100% compatible with Control-Box®
- 100% polypropylene (modules stamped PP)
- Modules lock together with connectors



#### Optional assembled dimensions:

	Type 20	Type 30	Type 40	Type 60
				
Width (mm)	600	600	600	600
Height (mm)	200	300	400	600
Depth (mm)	600	600	600	600
Weight (kg)	3.6	5.4	7.2	10.8
Volume (L gross)	72	108	144	216

